


Ultra Thin Body, Generous And Elegant

- Big screen HD display, visual enjoyment
- Exquisite craft, perfect quality
- Aluminum alloy frame, concise and not simple

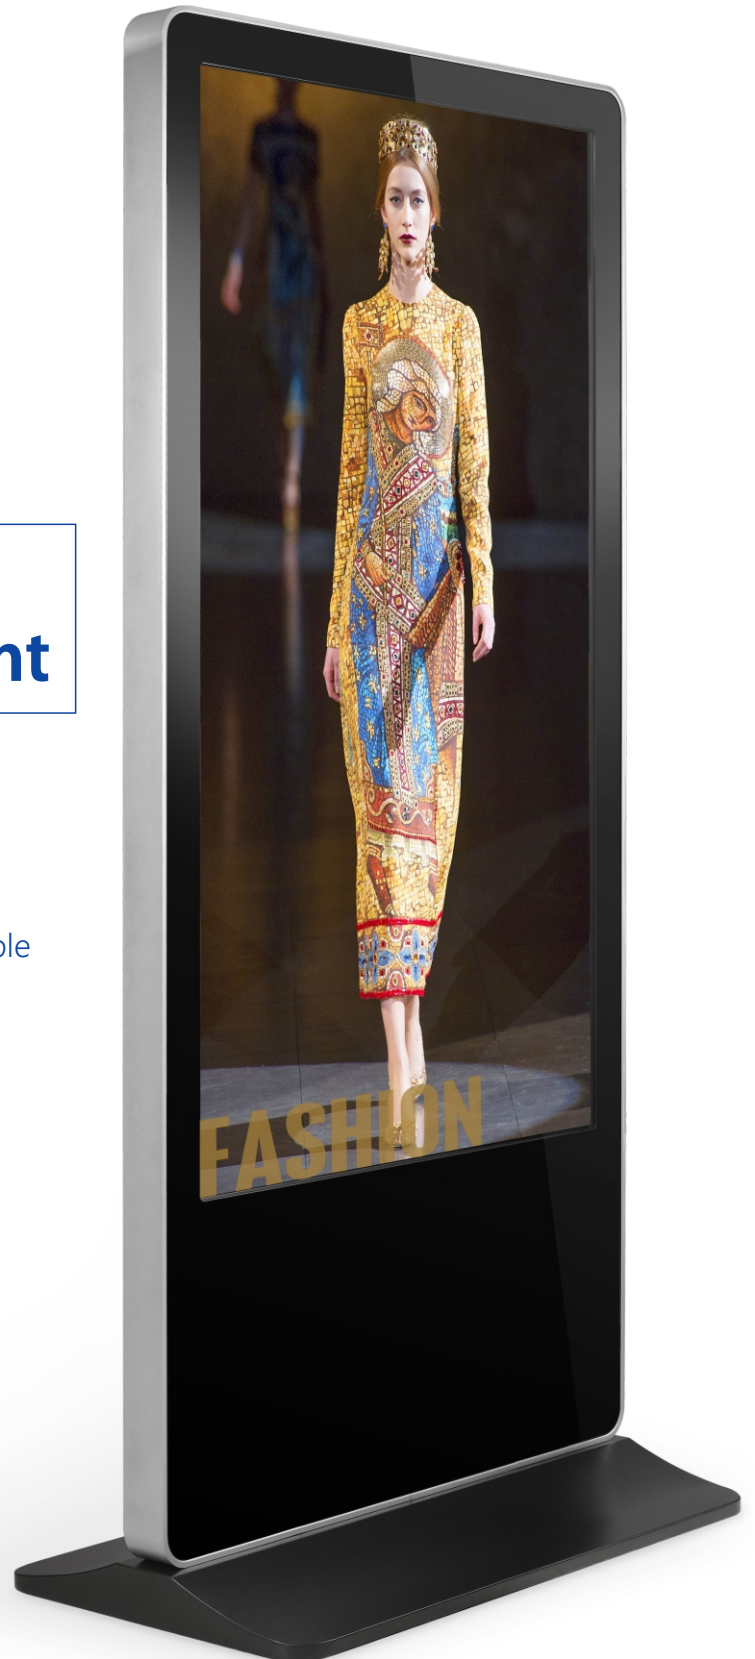

U Function

Metal texture, delicate and magnificent

Aluminum alloy frame, delicate and light body, simple, stable, dignified and decent as a whole with more elegance and fashion.

LED large screen and fresh and natural image quality

1080P high-definition display, dazzling image quality, high contrast, high color gamut and quick response for bright and vivid image and return to true world.

Support mainstream video formats

Support AVI,MPBG4,WMMV,FLV and other mainstream video formats

Intelligent OS

Centralized management, authorization management, safety management (file encryption, examination and approval procedure), monitoring management (online monitoring, log query and statistic analysis), system data access, and service integration.

Multi-area display, free selection

Support the play of media contents such as video, image and texts in different areas, freely split screen for display, and display ads more accurately in diversified manners.

Intelligent play

Receive media contents via network, play rich contents such as video, audio, image and text; store locally and support different play modes including cycleplay, intercut, timing play, and background play.

U Parameters

| Specification | 43UN | 49UN | 55UN | 65UN |
|---------------------------|---|----------------------|----------------------|----------------------|
| Display parameters | | | | |
| Panel size | 55" | 49" | 55" | 65" |
| LCD type | LED | LED | LED | LED |
| Bare dimension(mm) | 645×400×1850 | 726×400×1950 | 808×400×1950 | 951×540×2030 |
| Packing dimension(mm) | 782×592×2120 | 886×566×2230 | 962×592×2229 | 1166×736×2340 |
| Power consumption | ≤90W | ≤110W | ≤140W | ≤170W |
| Operating voltage | 100V-240VAC,50/60Hz | 100V-240VAC,50/60Hz | 100V-240VAC,50/60Hz | 100V-240VAC,50/60Hz |
| Optimum resolution | 1920×1080@60Hz | 1920×1080@60Hz | 1920×1080@60Hz | 1920×1080@60Hz |
| Viewing angel | 178°, 178° | 178°, 178° | 178°, 178° | 178°, 178° |
| Brightness | 260cd/m ² | 330cd/m ² | 350cd/m ² | 350cd/m ² |
| Contrast ratio | 1200:1 | 1200:1 | 1200:1 | 1400:1 |
| Response time | 8ms | 9ms | 9ms | 8ms |
| Color | 16.7M | 16.7M | 16.7M | 16.7M |
| Sound configuration | 10W+10W | 10W+10W | 10W+10W | 10W+10W |
| Program | Standard configuration of Android/PC (optional) | | | |
| Touch | Standard configuration without touch/touch (optional) | | | |
| External interface | | | | |
| USB | ×2 | ×2 | ×2 | ×2 |
| RJ-45(LAN) | ×1 | ×1 | ×1 | ×1 |

Manufacturing strength | Quality control | After sales service

Commercial company production line



Module production line



Commercial display product assembly line



Professional display product assembly line

iSEMC commercial advantage



Screen resource

LGD PD general agent.
Low-cost self-produced screen.



Factory manufacturing

Reliable quality.
Assembly professional production.
Meet differentiated needs.



Technical services

Complete range of products.
Meet differentiated needs.



Cooperation mode

Focus on OEM, low marketing costs.
Flexible and diverse.



Beijing Lema Technology Co.,Ltd.

Tel:+86 10 61706912 | Fax:+86 10 61706912
Email:info@isemc.com | Website:www.isemc.com