

HOD SERIES

LED Display

INTRODUCTION

HOD Series displays are designed to withstand harsh weather conditions and provide bright, high-contrast images that are visible from a distance. They typically consist of a matrix of LED pixels that can be individually controlled to produce a wide range of colors and animations. The resolution of outdoor LED displays can vary from low-resolution screens that display simple text and graphics to high-resolution screens that can display HD or even 4K video.

HOD Series displays can be customized to meet the specific needs of the user, including size, shape, and pixel density. They can also be controlled remotely using specialized software, allowing for real-time updates and content scheduling.



FEATURES

- **High Brightness:** HOD outdoor LED displays are easily visible in daylight and under bright sunlight. Look for displays with a high brightness rating to ensure good visibility.
- **Good weather resistance:** HOD outdoor LED displays are designed to withstand exposure to rain, wind, and extreme temperatures. Look for displays with an IP65 or higher rating to ensure weather-resistance.
- **Wide viewing angle:** HOD outdoor LED displays with a wide viewing angle ensure that they can be seen clearly from a range of different positions and angles.
- **Better contrast ratio:** The contrast ratio of HOD outdoor LED displays is generally better, against a bright background.
- **High energy efficiency:** HOD outdoor LED displays are energy-efficient to help minimize running costs.
- **Suitable pixel pitch:** HOD Series displays have a smaller pixel pitch which results in higher image resolution and better picture quality.
- **Good connectivity:** HOD outdoor LED displays can be controlled remotely using a computer or mobile device.
- **Special modular design:** HOD outdoor LED displays have a unique cabinet design – Easy to Install & Transport.

RELEVANT FUNCTION INDICATION



Low gray scale



High gray scale

Excellent Display Effect

- Broadcast color gamut, color temperature intelligent adjustable, moderate brightness, long time viewing without fatigue, ultra-high refresh display, fast frame change speed, eliminate ghost without trailing, low light high ash non-destructive technology.

Stable & Reliable with IP65 Rating

- The special waterproof design of LED Screen protects it from water and dust. When installed in outdoor areas, protection is a serious matter. Special guard protects it from environment dangers. High IP Rating - IP65 ensures great quality outputs in every condition. Fully sealed magnesium aluminum box design, anti-corrosion, flame retardant, UV resistance.



Easy to Install & Transport



- The special unique cabinet design of LED Screen protects it from water and dust. When installed in outdoor environment, protection is a serious matter. Special guard protects it from environment dangers. Also to ensure the long-life span and good performance.



HOD Series

Wide Viewing Angle

- A wide viewing angle of 160° horizontal and 140° in vertical which reaches more viewers. The picture quality remains seamless in all direction and at a distance, presenting all viewers the same highly quality outputs. This makes it suitable for large gathering and outdoor advertisement.

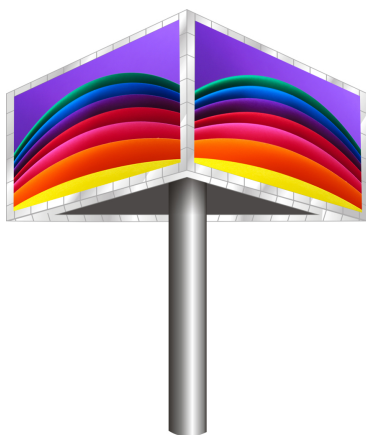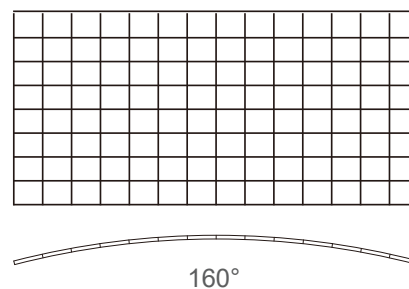

High Brightness

- HOD outdoor LED displays up to 7500 cd/m2 brightness allows for placement in any lighting condition is easily visible in daylight and under bright sunlight. Look for displays with a high brightness rating to ensure good visibility.

Usage scenario



HOD Series

SPECIFICATIONS

Product Name	P5	P5.9259	P6	P6.67	P8	P10
Pixel Pitch(mm)	5	5.9259	6	6.67	8	10
Pixel Density (pixels/sqm)	40,000	28,476	27,777	22,500	15,625	10,000
Cabinet Resolution	192×192	162×162	160×160	144×144	120×120	96×96
Cabinet Dimension(mm)	960×960	960×960	960×96	960×960	960×960	960×960
Lamp Type	SMD2727	SMD2727	SMD2727	SMD2727	SMD3535	SMD3535
Module Size(mm)	320×160	320×160	192×192	320×320	320×160	320×160
Module Resolution(mm)	64×32	54×27	32×32	48×24	40×20	32×16
Optimum Viewing Distance(m)	5-50	6-80	6-60	7-70	8-80	10-100
Horizontal Viewing Angle	≥110°	≥110°	≥160°	≥110°	≥110°	≥160°
Vertical Viewing Angle	≥110°	≥110°	≥140°	≥110°	≥110°	≥140°
Control System	Synchronous Control	Synchronous Control	Synchronous Control	Synchronous Control	Synchronous Control	Synchronous Control
Average Power Consumption(w/m ²)	240	250	240	250	250	250
Max Power Consumption(w/m ²)	760	780	760	780	780	780
Drive Mode	1/8	1/7	1/8	1/6	1/5	1/2
Refresh Rate(hz)	1920	1920	1920	3840	1920	1920
Brightness(cd/m ²)	7500	7500	7500	7500	7500	7500
Operating Temp(°C)	-20°C~60°C					
Storage Temp(°C)	-25°C~60°C					
Life Time (hrs)	75,000~100,000					

HOD Series